


## Y-Fitting Loop End **A**

- Made to customers own specifications of wire leg lengths.
- Available in 1mm, 2mm & 3mm cable thicknesses.
- Suitable for DG1, DG2 & DG3 DobyGrip units.
- Height is adjusted using a DobyGrip as an additional extra to the kit.
- Re-attachment to service is effective when used with Carabina accessory.
- **Minimum leg length (B) of 150mm (measurements inclusive of looped ends & ferrules).**
- Please complete the customer requirement form overleaf for your customised fittings, alternatively contact the sales office on **+44 1207 238844** for more information on pre-made standard held stock lengths.


Both kit types (**A & B**) include Loop ended wire rope with optional Carabina or Eye Bolt. If either are used please remember these will be additional lengths to your Y-Fitting dimensions:

Wire dia.	Carabina	Eyebolt	
		M6	M8
1mm	40mm	72mm	87mm
2mm	60mm	72mm	87mm
3mm	100mm	72mm	87mm

Both kit types are perfect for use with our Spring Clip also.

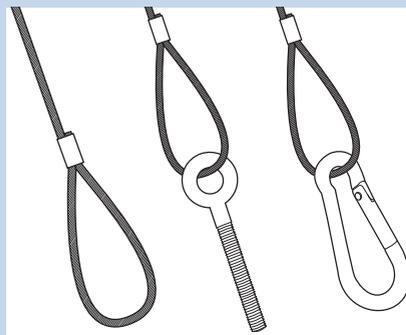

Loop      Loop + Eyebolt      Loop + Carabina

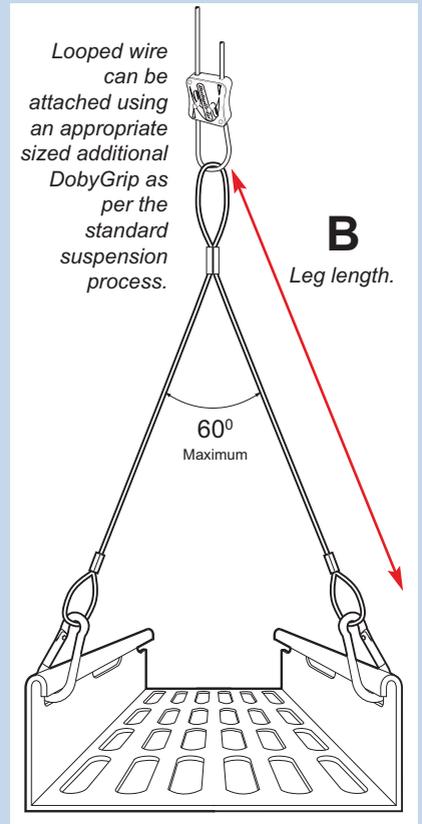


Allows for inspection access into services and further adjustment if required.  
For use with static loads only. 60° Max angle.

## Y-Fitting Plain End **B**

- Made to customers own specifications of wire leg lengths, but with non looped cable end for individual height application.
- Available in 1mm, 2mm & 3mm cable thicknesses.
- Suitable for DG1, DG2 & DG3 DobyGrip units.
- Height is adjusted using the included DobyGrip as part of the kit.
- Re-attachment to service is effective when used with carabina accessory.
- **Minimum leg length (B) of 150mm to a maximum overall cable length of 10m (inclusive of looped ends & ferrules).**
- Please complete the customer requirement form overleaf for your customised fittings, alternatively contact the sales office on **+44 1207 238844** for more information on pre-made standard held stock lengths.



Y-Fittings - Plain & Looped Ends

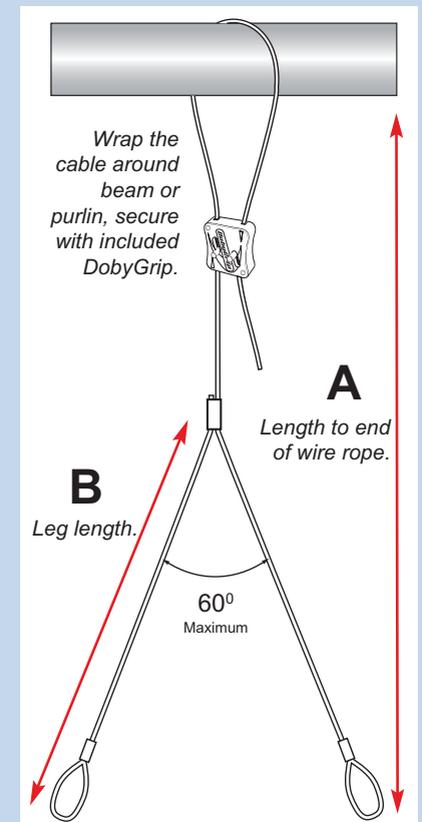

Allows for inspection access into services and further adjustment if required.  
For use with static loads only. 60° Max angle.

